

**Jabra**<sup>®</sup>  
YOU'RE ON

# JABRA EVOLVE 65



User Manual

[jabra.com/evolve65](http://jabra.com/evolve65)



A BRAND BY

**GN Netcom**

---

© 2014 GN Netcom A/S / GN Netcom US, Inc. All rights reserved. Jabra® is a registered trademark of GN Netcom A/S. All other trademarks included herein are the property of their respective owners. The Bluetooth® word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by GN Netcom A/S is under license.

---

Made in China

MODEL: HSC018W

FCC ID: BCE-HSC018W

IC: 2386C-HSC018W



---

**Declaration of Conformity** can be found on  
[www.jabra.com/CP/US/declarations-of-conformity](http://www.jabra.com/CP/US/declarations-of-conformity)

|  |    |
|--|----|
| 1. WELCOME .....                               | 4  |
| 2. JABRA EVOLVE 65 OVERVIEW .....              | 5  |
| 2.1 STEREO VARIANT                             |    |
| 2.2 MONO VARIANT                               |    |
| 2.3 OPTIONAL ACCESSORIES (STEREO AND MONO)     |    |
| 3. HOW TO WEAR.....                            | 7  |
| 3.1 STEREO AND MONO                            |    |
| 3.2 ADJUST THE HEADBAND                        |    |
| 3.3 POSITION THE MICROPHONE                    |    |
| 3.4 STORING THE MICROPHONE                     |    |
| 4. HOW TO CHARGE THE BATTERY .....             | 10 |
| 5. HOW TO CONNECT .....                        | 11 |
| 5.1 CONNECT TO PC (USING JABRA LINK 360)       |    |
| 5.2 CONNECT TO MOBILE DEVICE (USING BLUETOOTH) |    |
| 5.3 CONNECT TO PC (USING USB CABLE)            |    |
| 6. HOW TO USE .....                            | 14 |
| 6.1 CALLS                                      |    |
| 6.2 MULTIPLE CALL HANDLING                     |    |
| 6.3 BUSYLIGHT                                  |    |
| 7. SUPPORT .....                               | 18 |
| 7.1 FAQ  |    |
| 7.2 HOW TO CARE FOR YOUR HEADSET               |    |
| 8. TECHNICAL SPECIFICATIONS .....              | 19 |

# 1. WELCOME

Thank you for using the Jabra Evolve 65. We hope you will enjoy it!

## **JABRA EVOLVE 65 FEATURES**

- Connects to PC via Jabra Link 360 bluetooth adapter or USB cable
- Connects to mobile devices via Bluetooth
- Integrated busylight
- Discreet microphone boom-arm that integrates into the headband when not on calls
- Superior music and voice capabilities
- Hi-Fi Sound

# 2. JABRA EVOLVE 65 OVERVIEW


## 2.1 STEREO VARIANT

---



## 2.2 MONO VARIANT

---

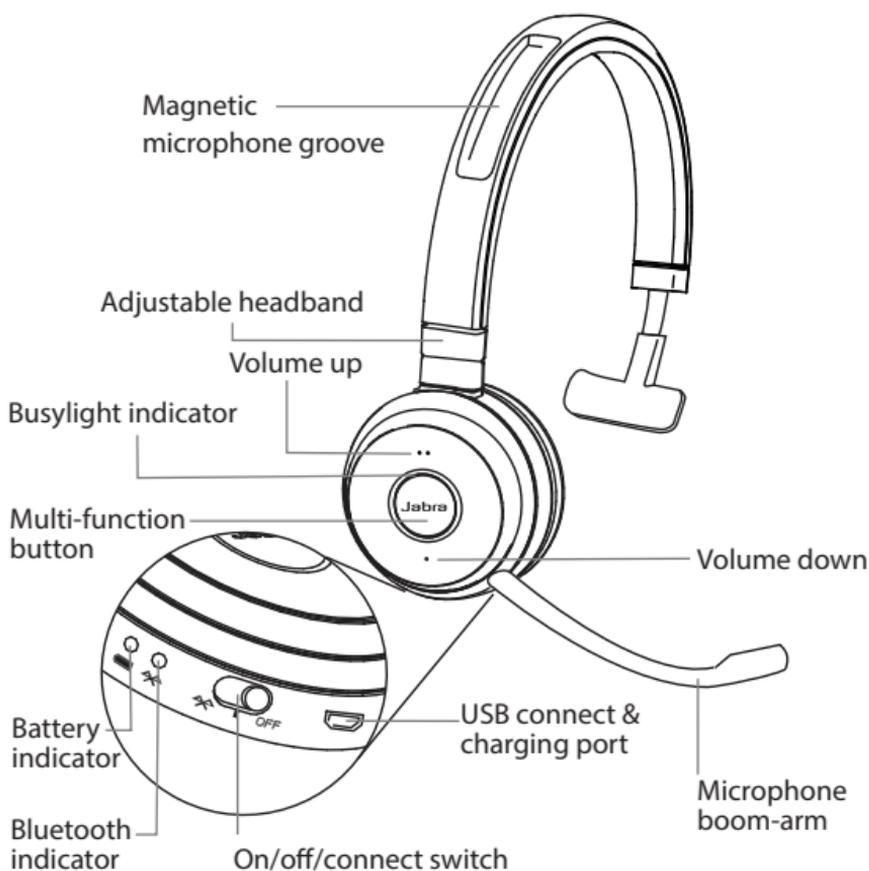

## 2.3 INCLUDED ACCESSORIES (STEREO AND MONO)

---



Carry pouch



USB cable


## 3. HOW TO WEAR



### 3.1 LEFT OR RIGHT WEARING STYLE

---

The Jabra Evolve 65 can be worn on the left or right by flipping the microphone to the other side (270° limit).

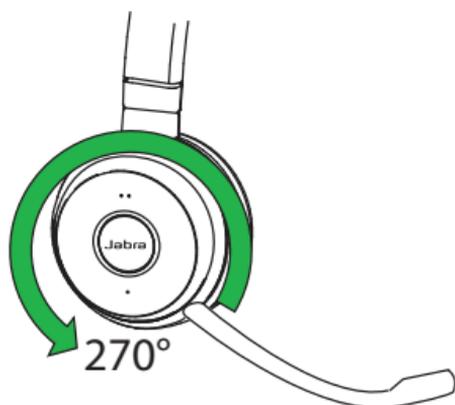

## 3.2 ADJUST THE HEADBAND

---

Adjust the headband to find the most comfortable fit.




## 3.3 POSITION THE MICROPHONE

---

It is recommended to position the microphone close to your mouth (0.5 inches).




The microphone is bendable for personal preference.

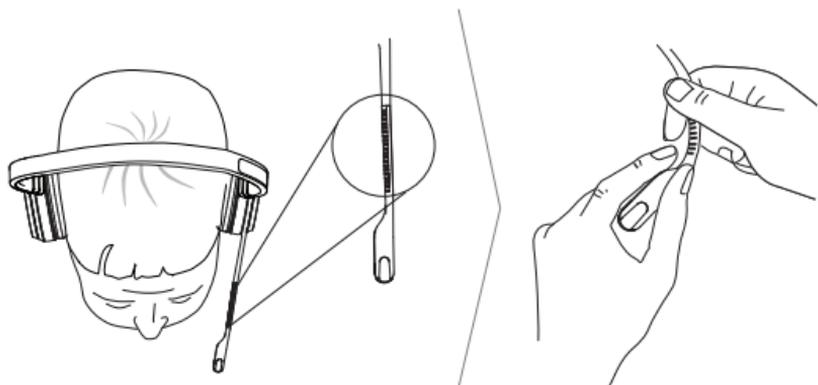

### 3.4 STORING THE MICROPHONE

---

When listening to music or outdoors, the microphone can be magnetically stored in the headband groove.

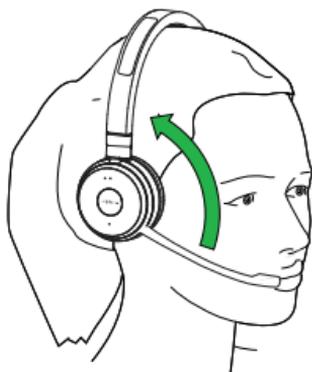


## 4. HOW TO CHARGE THE BATTERY

The headset battery will charge when connected to a PC using a USB cable, or when using any USB charger supplied with your mobile device.

The headset can still be used for calls while charging using a USB cable connected to a PC.

It takes approx. 3 hours to charge the battery.

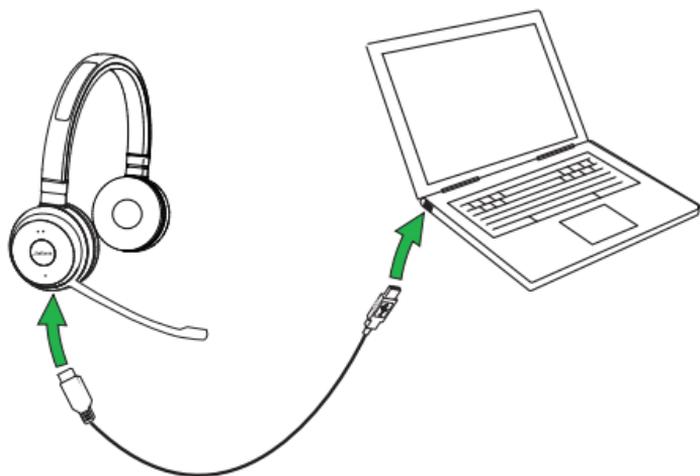

# 5. HOW TO CONNECT

## 5.1 CONNECT TO PC (USING JABRA LINK 360)

---


1. Ensure the headset is switched on.
2. Plug the Jabra Link 360 dongle into a USB port on your PC. The headset and Jabra Link 360 are already pre-connected.



## 5.2 CONNECT TO MOBILE DEVICE (USING BLUETOOTH)

---


1. Wear the headset.
2. Hold (3 secs) the **On/off/connect** switch in the connect position until you hear the voice guided instructions. The Bluetooth indicator will flash blue.
3. Follow the voice guided instructions to connect.

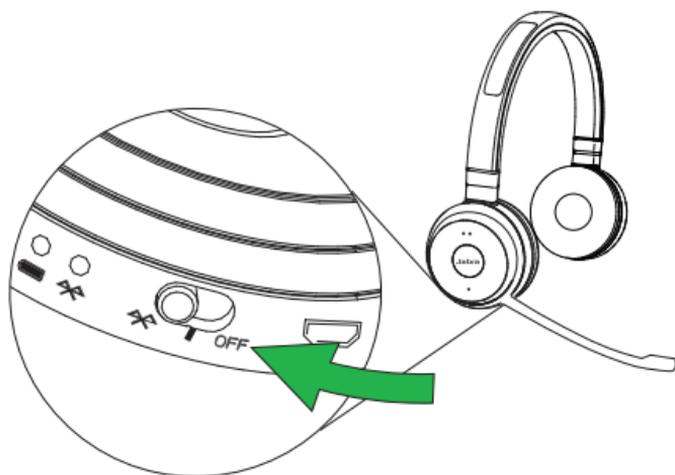


## 5.3 CONNECT TO PC (USING USB CABLE)

---

1. Ensure the headset is switched on.
2. Plug the headset into a USB port on your PC using the supplied USB cable.


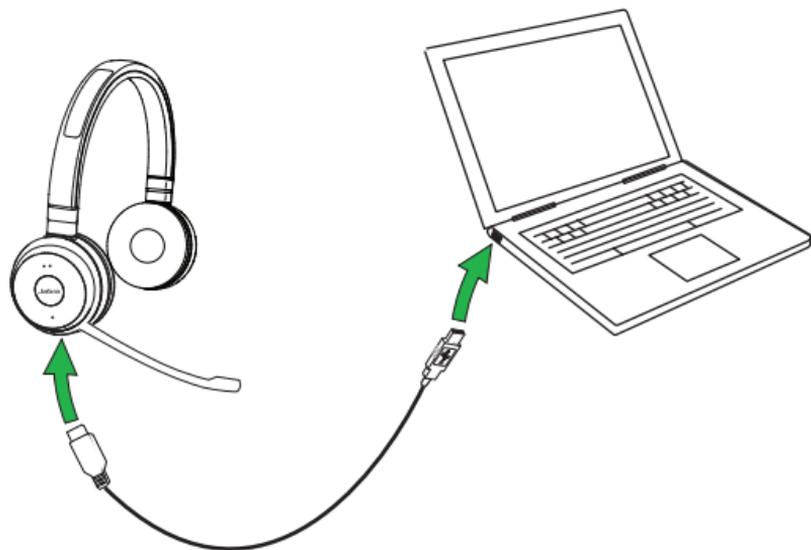


## 6. HOW TO USE

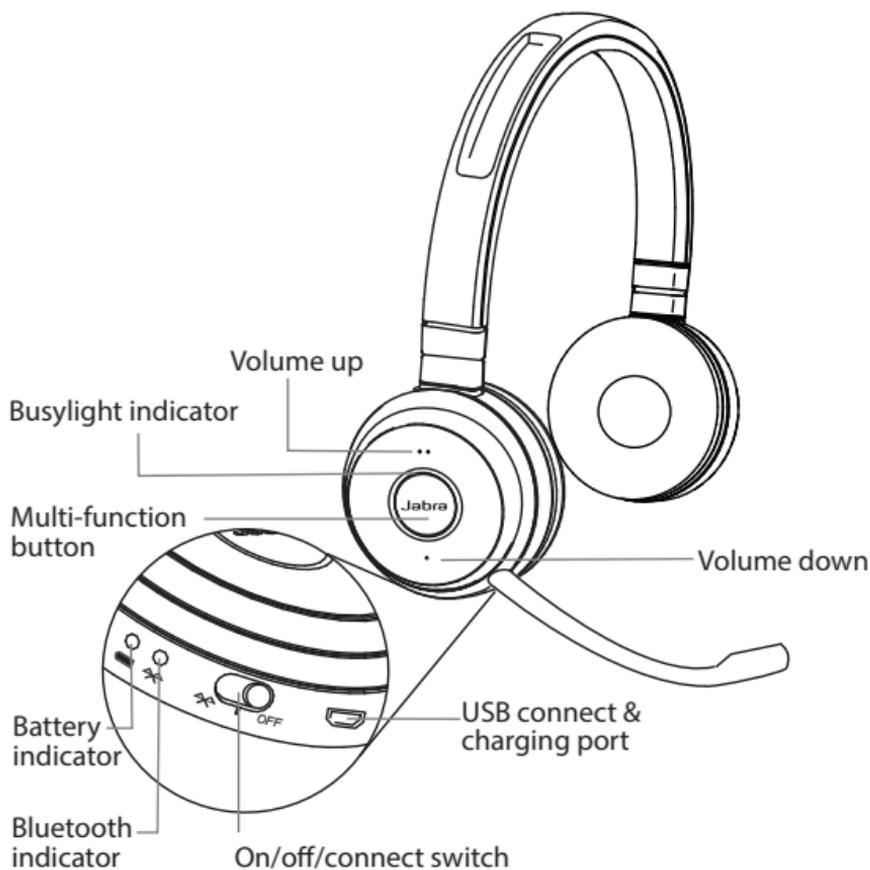

## 6.1 EVERYDAY USE


---

|   | FUNCTION                          | ACTION   |
|---|-----------------------------------|--|
|    | Headset on/off                    | Slide the <b>On/off/connect</b> switch   |
|   | Answer/end call                   | Tap the <b>Multi-function</b> button   |
|   | Reject call                       | Double-tap the <b>Multi-function</b> button  |
|    | Battery and connection status     | Tap the <b>Multi-function</b> button when not on a call                                    |
|   | Enable/disable Voice prompts      | Press and hold the <b>Multi-function</b> button while turning on the headset               |
|   | Adjust volume                     | Tap the <b>Volume up</b> or <b>Volume down</b> button                                      |
|   | Manual busylight on/off           | Simultaneously tap the <b>Volume up</b> and <b>Volume down</b> buttons                     |
|  | Enable/disable Busylight function | Simultaneously press and hold (3 secs) the <b>Volume up</b> and <b>Volume down</b> buttons |
|  | Mute/unmute microphone            | Press and hold (2 secs) the <b>Volume down</b> button                                      |

## 6.2 MULTIPLE CALL HANDLING

---

The headset can accept and handle multiple calls at the same time.

| FUNCTION   | ACTION   |
|--|--|
| End current call and answer incoming call  | Tap the <b>Multi-function</b> button                     |
|  Switch between held call and active call | Press and hold (2 secs) the <b>Multi-function</b> button |
| Put current call on hold and answer incoming call  | Press and hold (2 secs) the <b>Multi-function</b> button |
| Reject incoming call, when on a call   | Double-tap the <b>Multi-function</b> button              |

## 6.3 BUSYLIGHT

---


The busylight indicator on the headset can be turned on to let others know that you are busy.

### MANUALLY TURN BUSYLIGHT ON/OFF

To manually turn the busylight on/off, tap both the **Volume up** and **Volume down** buttons at the same time.

### ENABLE/DISABLE BUSYLIGHT FUNCTION

To enable/disable the busylight function, press and hold (3 secs) both the **Volume up** and **Volume down** buttons at the same time.

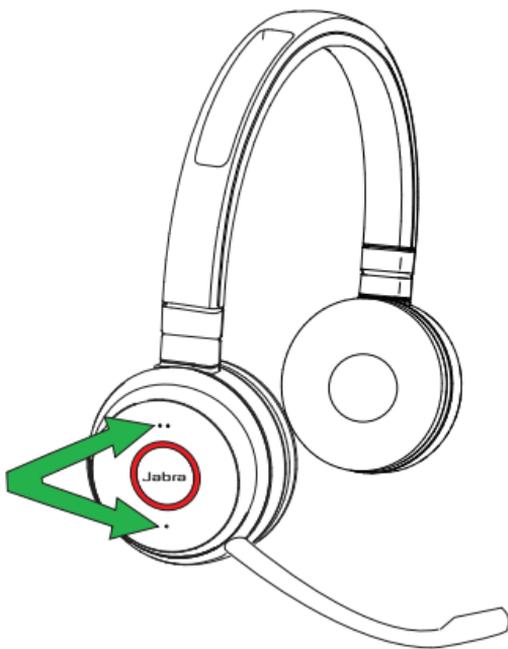

# 7. SUPPORT

## 7.1 FAQ

---

View the FAQs on [Jabra.com/evolve65](https://www.jabra.com/evolve65)

## 7.2 HOW TO CARE FOR YOUR HEADSET

---

- Always store the headset with the power off and safely protected.
- Avoid storage at extreme temperatures (above 55°C/131°F or below -10°C/14°F). This can shorten battery life and may adversely affect the headset.

## 8. TECHNICAL SPECIFICATIONS

| JABRA EVOLVE 65 HEADSET         | SPECIFICATION  |
|---------------------------------|--|
| Headset weight:                 | Mono headset: 79 g<br>Stereo headset: 111 g  |
| Headset dimensions:             | Mono headset: L 154.4 mm x<br>W 58.6 mm x H 170.4 mm<br>Stereo headset: L 155.5 mm x<br>W 58.6 mm x H 170.5 mm |
| Microphones:                    | Noise cancelling microphone  |
| Speaker:                        | 28 mm Dynamic PureSound<br>speakers (Hi-Fi)  |
| Speaker maximum input<br>power: | 10 mW  |
| Speaker frequency range:        | 70 hz - 20 kHz   |
| Cable length:                   | Controller to PC: 90 mm<br>Headset to 3.5mm jack: 1.2 m  |
| Operating temperature:          | -10°C to 55°C (14°F to 131°F)  |
| Storage temperature:            | -20°C to 25°C (-4°F to 77°F)   |

| <b>BLUETOOTH ADAPTER<br/>(JABRA LINK 360)</b> | <b>SPECIFICATION</b>                   |
|---|--|
| PC connection:                                | USB 2.0                                |
| Bluetooth version:                            | 4.0                                    |
| Bluetooth range:                              | Up to 100m (300 feet), Class 1         |
| Bluetooth profiles:                           | A2DP (v1.2), Hands free profile (v1.6) |
| Simultaneous Bluetooth connections:           | 1                                      |
| Bluetooth audio bandwidth                     | HD voice (wideband), A2DP              |
| Visual indicators:                            | Multicolor LED                         |

