

# Dell Latitude 7300

## Setup and Specifications



## Notes, cautions, and warnings

 | **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 | **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

 | **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

© 2019 Dell Inc. or its subsidiaries. All rights reserved. Dell, EMC, and other trademarks are trademarks of Dell Inc. or its subsidiaries. Other trademarks may be trademarks of their respective owners.

# Contents

<b>1 Set up your computer</b> .....	<b>5</b>
<b>2 Chassis</b> .....	<b>7</b>
Front view.....	7
Left view.....	8
Right view.....	8
Palmrest view.....	9
Bottom view.....	10
<b>3 Keyboard shortcuts</b> .....	<b>11</b>
<b>4 Technical specifications</b> .....	<b>12</b>
System information.....	12
Processor.....	12
Memory.....	12
Storage.....	13
Media card-reader.....	13
Audio.....	13
Video card.....	14
Camera.....	14
Ports and connectors.....	14
Wireless.....	15
Wireless LAN card specifications.....	15
WWAN card specifications.....	15
Display.....	15
Keyboard.....	16
Touchpad.....	16
Touchpad gestures.....	16
Operating system.....	16
Battery.....	17
Power adapter.....	18
Dimensions and weight.....	18
Computer environment.....	18
<b>5 System setup</b> .....	<b>20</b>
Boot menu.....	20
Navigation keys.....	20
Boot Sequence.....	21
System setup options.....	21
General options.....	21
System configuration.....	23
Video screen options.....	26
Security.....	26

Secure boot.....	28
Intel Software Guard Extensions options.....	29
Performance.....	29
Power management.....	30
Post behavior.....	31
Manageability.....	32
Virtualization support.....	33
Wireless options.....	33
Maintenance.....	33
System logs.....	34
Updating the BIOS in Windows .....	34
Updating BIOS on systems with BitLocker enabled.....	35
Updating your system BIOS using a USB flash drive.....	35
System and setup password.....	36
Assigning a system setup password.....	36
Deleting or changing an existing system setup password.....	36
<b>6 Software.....</b>	<b>38</b>
Downloading drivers.....	38
<b>7 Getting help.....</b>	<b>39</b>
Contacting Dell.....	39

# Set up your computer

- 1 Connect the power adapter and press the power button.

**NOTE:** To conserve battery power, the battery might enter power saving mode.



- 2 Finish the Windows system setup.
- 3 Follow the on-screen instructions to complete the setup. When setting up, Dell recommends that you:
  - Connect to a network for Windows updates.

**NOTE:** If connecting to a secured wireless network, enter the password for the wireless network access when prompted.

- If connected to the internet, sign-in with or create a Microsoft account. If not connected to the internet, create an offline account.
  - On the **Support and Protection** screen, enter your contact details.
- 4 Locate and use Dell apps from the Windows Start menu—Recommended

**Table 1. Locate Dell apps**

Dell apps	Details
	<p><b>Dell Product Registration</b></p> <p>Register your computer with Dell.</p>
	<p><b>Dell Help &amp; Support</b></p> <p>Access help and support for your computer.</p>

**SupportAssist**

Proactively checks the health of your computer's hardware and software.

 **NOTE:** Renew or upgrade your warranty by clicking the warranty expiry date in SupportAssist.

**Dell Update**

Updates your computer with critical fixes and important device drivers as they become available.

**Dell Digital Delivery**

Download software applications including software that is purchased but not pre-installed on your computer.

- 5 Create recovery drive for Windows.

 **NOTE:** It is recommended to create a recovery drive to troubleshoot and fix problems that may occur with Windows.

- 6 For more information, see [Create a USB recovery drive for Windows](#).


## Chassis

This chapter illustrates the multiple chassis views along with the ports and connectors and also explains the FN hot key combinations.

Topics:

- Front view
- Left view
- Right view
- Palmrest view
- Bottom view

### Front view

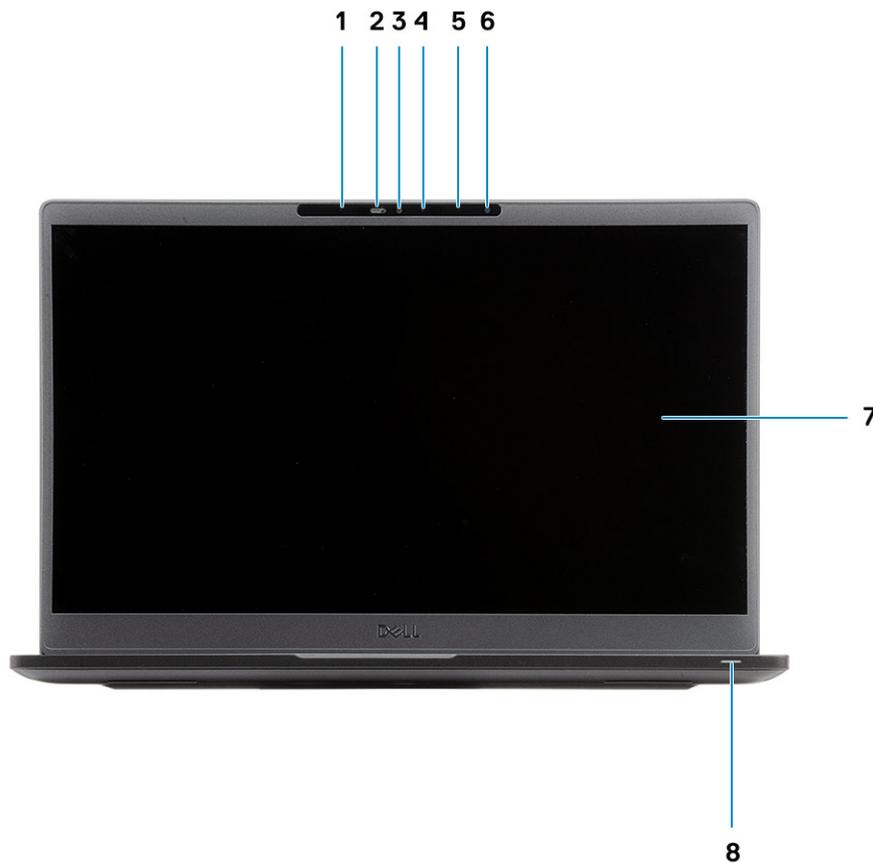

- 1 IR emitter
- 2 SafeView switch
- 3 Camera
- 4 Camera status LED

- 5 IR emitter
- 6 Microphone array
- 7 Display panel
- 8 Battery status LED

## Left view



- 1 Power adapter port
- 2 USB Type-C 3.1 Gen 2 port (Thunderbolt)
- 3 HDMI 1.4a port
- 4 USB Type-A 3.1 Gen 1 port
- 5 Smart card slot

## Right view



- 1 Universal audio port (Headset Jack + microphone-in + line-in support)
- 2 micro-SD 4.0 memory card reader
- 3 SIM card slot
- 4 USB Type-A 3.1 Gen 1 ports (PowerShare capable)

# Palmrest view



- 1 Power button (with optional finger print reader - no LED)
- 2 Keyboard
- 3 Touchpad

# Bottom view



- 1 Thermal vent
- 2 Service tag label
- 3 Speakers

# Keyboard shortcuts

**NOTE:** Keyboard characters may differ depending on the keyboard language configuration. Keys used for shortcuts remain the same across all language configurations.

**Table 2. List of keyboard shortcuts**

Keys	Description
Fn + Esc	Toggle Fn-key lock
Fn + F1	Mute audio
Fn + F2	Decrease volume
Fn + F3	Increase volume
Fn + F4	Mute microphone
Fn + F5	Keyboard backlight
	<b>NOTE:</b> Not applicable for non-backlight keyboard.
Fn + F6	Decrease brightness
Fn + F7	Increase brightness
Fn + F8	Switch to external display
Fn + F10	Print Screen
Fn + F11	Home
Fn + F12	End
Fn + insert	Num Lock

# Technical specifications

**NOTE:** Offerings may vary by region. The following specifications are only those required by law to ship with your computer. For more information about the configuration of your computer, go to Help and Support in your Windows operating system and select the option to view information about your computer.

## System information

**Table 3. System information**

Feature	Specifications
Chipset	Intel Chipset
DRAM bus width	64-bit
FLASH EPROM	24 MB / 32 MB
PCIe bus	100 Mhz

## Processor

**NOTE:** Processor numbers are not a measure of performance. Processor availability is subject to change and may vary by region/country.

**Table 4. Processor specifications**

Type	UMA Graphics
8th Generation Intel core i5-8265U Processor (Quad Core (QC), 6M SmartCache, base frequency 1.6 GHz, up to 3.9 GHz)	
8th Generation Intel core i7-8665U Processor (QC, 8M SmartCache, base frequency 1.9 GHz, up to 4.8 GHz)	Intel UHD Graphics 620 (8th Generation Intel Core)
8th Generation Intel core i5-8365U Processor (QC, 6M SmartCache, base frequency 1.6 GHz, up to 4.1 GHz)	

## Memory

**Table 5. Memory specifications**

Feature	Specifications
Minimum memory configuration	4 GB
Maximum memory configuration	32 GB
Number of slots	Two SoDIMM

Feature	Specifications
Memory options	<ul style="list-style-type: none"> <li>• 4 GB - 1 x 4 GB</li> <li>• 8 GB - 1 x 8 GB</li> <li>• 8 GB - 2 x 4 GB</li> <li>• 16 GB - 1 x 16 GB</li> <li>• 16 GB - 2 x 8 GB</li> <li>• 32 GB - 2 x 16 GB</li> </ul>
Type	DDR4
Speed	2400 MHz

## Storage

**Table 6. Storage specifications**

Type	Form factor	Interface	Capacity
Solid-state drive	M.2 2280	PCIe / SATA	Up to 1 TB
Solid-state drive	M.2 2230 (With bracket)	PCIe	128 GB
Self Encrypting Drive (SED) / Opal SED	M.2 2280	PCIe NVMe	256 GB

## Media card-reader

**Table 7. Media card-reader specifications**

Feature	Specifications
Type	One micro-SD card slot
Supported cards	<ul style="list-style-type: none"> <li>• SD</li> <li>• SDHC</li> <li>• SDXC</li> </ul>

## Audio

**Table 8. Audio specifications**

Feature	Specifications
Controller	Realtek ALC3254 with Waves MaxxAudio Pro
Type	Two-channel high-definition audio
Speakers	Two (Directional speakers)
Interface	Intel HDA bus
Internal speaker amplifier	2 W (RMS) per channel

# Video card

Table 9. Video card specifications

Controller	Type	CPU Dependency	Graphics memory type	Capacity	External display support	Maximum resolution
Intel UHD Graphics 620	UMA	<ul style="list-style-type: none"><li>8th Gen Intel Core i5 processor</li><li>8th Gen Intel Core i7 processor</li></ul>	Integrated	Shared system memory	HDMI 1.4a	4096 x 2304

# Camera

Table 10. Camera specifications

Feature	Specifications
Resolution	<ul style="list-style-type: none"><li>Still image: 0.92 megapixels</li><li>Video: 1280 x 720 at 30 fps</li></ul>
Diagonal viewing angle	<ul style="list-style-type: none"><li>Diagonal <math>&gt;/ 86.7^\circ</math> (tolerance +/- 3%)</li><li>Vertical <math>&gt;/ 47^\circ</math></li></ul>
Camera Options	<ul style="list-style-type: none"><li>No Camera</li><li>6.0 mm RGB HD</li><li>6.0 mm RGB IR</li><li>3.0 mm RGB IR</li><li>2.7 mm RGB HD</li></ul> <p>Ambient Light Sensor is only available with the 3mm IR camera option</p>
Video Max resolution	1280 x 720 (HD) at 30 FPS
Still image max resolution	0.92 megapixel (1280 x 720)

# Ports and connectors

Table 11. Ports and connectors

Features	Specifications
Memory card reader	micro-SD 4.0 memory card reader (optional)
USB	<ul style="list-style-type: none"><li>One USB Type-C 3.1 Gen 2 port (Thunderbolt)</li><li>Two USB Type-A 3.1 Gen 1 ports (one PowerShare capable)</li></ul>
Security	<ul style="list-style-type: none"><li>Noble Wedge lock slot</li><li>Smart card reader (optional)</li></ul>

Features	Specifications
Docking port	Dell USB 3.0 Dock (UNO)
Audio	Universal audio jack (Headset Jack + microphone-in + line-in support)
Video	HDMI 1.4a

## Wireless

### Wireless LAN card specifications

**Table 12. Wireless LAN card specifications**

#### Wireless card options

Qualcomm QCA61x4A 802.11ac Dual Band (2x2) Wireless Adapter + Bluetooth 4.2 (non vPro)

Intel Dual-Band Wireless-AC 9560 Wi-Fi + Bluetooth 5.0 Wireless Card (2x2)(vPro)(Bluetooth Optional)

Intel Wi-Fi 6 AX200 2x2 .11ax 160MHz + Bluetooth 5.0

### WWAN card specifications

**Table 13. Wireless WAN card specifications**

#### Wireless card option

Mobile Broadband Qualcomm Snapdragon X20 Global Gigabit LTE (Optional)

## Display

**Table 14. Display specifications**

Feature	Specifications
Type	<ul style="list-style-type: none"> <li>13.3-in. HD AG (WXGA 1366x768), 220 nits, non-touch display</li> <li>13.3-in. FHD AG (1920 x 1080), 300 nits, non-touch display</li> <li>13.3-in. FHD AG (1920 x 1080), 300 nits, non-touch display with Dynamic Privacy Dell SafeScreen</li> <li>13.3-in. FHD AG (1920 x 1080), 255 nits, touch display</li> </ul>
Height (Active area)	165.24 mm (6.5 in.)
Width (Active area)	293.76 mm (11.55 in.)
Diagonal	<ul style="list-style-type: none"> <li>HD: 337.08 mm (13.27 in.)</li> <li>FHD: 337.04 mm (13.26 in.)</li> </ul>
Luminance/Brightness (typical)	HD: 220 nits (Super Low Power) / FHD: 300 nits

Feature	Specifications
Refresh rate	60 Hz

## Keyboard

**Table 15. Keyboard specifications**

Feature	Specifications
Number of keys	<ul style="list-style-type: none"> <li>• 81 (U.S)</li> <li>• 82 (UK)</li> <li>• 82 (Brazil)</li> <li>• 85 (Japan)</li> </ul>
Size	Full sized <ul style="list-style-type: none"> <li>• X= 18.05 mm key pitch</li> <li>• Y= 18.05 mm key pitch</li> </ul>
Backlit keyboard	Optional
Layout	QWERTY / AZERTY / Kanji

## Touchpad

**Table 16. Touchpad specifications**

Feature	Specifications
Resolution	1048 x 984
Dimensions	<ul style="list-style-type: none"> <li>• Width: 3.91 inch (99.5 mm)</li> <li>• Height: 2.08 inch (53 mm)</li> </ul>
Multi-touch	Configurable single finger and multi-finger gestures

## Touchpad gestures

For more information about touchpad gestures for Windows 10, see the Microsoft knowledge base article [4027871](https://support.microsoft.com/4027871) at [support.microsoft.com](https://support.microsoft.com).

## Operating system

**Table 17. Operating system**

Feature	Specifications
Operating systems supported	<ul style="list-style-type: none"> <li>• Windows 10 Home (64 bit)</li> <li>• Windows 10 Pro (64 bit)</li> <li>• Ubuntu</li> </ul>

# Battery

**Table 18. Battery specifications**

Type	<ul style="list-style-type: none"> <li>• Polymer 3-cell 42 WHr</li> <li>• Polymer 4-cell 60 WHr</li> <li>• Polymer 4-cell 60 WHr (LCL)</li> </ul>
Dimension	<p>Polymer 3-cell 42 WHr</p> <ul style="list-style-type: none"> <li>• Width: 95.9 mm (3.78 in)</li> <li>• Length: 200.5 mm (7.89 in)</li> <li>• Height: 5.7 mm (0.22 in)</li> </ul> <p>Polymer 4-cell 60 WHr and LCL</p> <ul style="list-style-type: none"> <li>• Width: 95.9 mm (3.78 in)</li> <li>• Length: 238 mm (9.37 in)</li> <li>• Height: 5.7 mm (0.22 in)</li> </ul>
Weight (maximum)	<ul style="list-style-type: none"> <li>• Polymer 3-cell 42 WHr: 192.5 g (0.42 lb)</li> <li>• Polymer 4-cell and LCL: 270 g (0.60 lb)</li> </ul>
Voltage	11.4 VDC
Life span	<ul style="list-style-type: none"> <li>• Polymer 3-cell 42 WHr and 4-cell 60 WHr (Standard Pack): 300 discharge / charge cycles</li> <li>• Polymer 4-cell 60 WHr (LCL): 1000 discharge / charge cycles</li> </ul>
Charging time when the computer is off (approximate)	<ul style="list-style-type: none"> <li>• Standard Charge: 0°C to 50°C : 4 hours</li> <li>• Express Charge<sup>†</sup>:             <ul style="list-style-type: none"> <li>– 0°C to 15°C : 4 hours</li> <li>– 16°C to 45°C : 2 hours</li> <li>– 46°C to 50°C : 3 hours</li> </ul> </li> </ul>
Operating time	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions
Temperature range: Operating	<ul style="list-style-type: none"> <li>• Charging: 0°C to 50°C (32°F to 122°F)</li> <li>• Discharging : 0°C to 70°C (32°F to 158°F)</li> </ul>
Temperature range: Storage	-20°C to 60°C (-4°F to 140°F)
Coin-cell battery	CR 2032

**NOTE:** <sup>†</sup>For batteries with the ExpressCharge feature, the battery will typically have at least an 80% charge after about an hour of charging with the system off, and fully charged in about 2 hours with the system off.

Enabling ExpressCharge requires that both the computer and the battery used be ExpressCharge capable. If these requirements are not met, ExpressCharge will not be enabled.

# Power adapter

**Table 19. Power adapter specifications**

Feature	Specifications
Type	<ul style="list-style-type: none"> <li>• E5 65 W 7.4 mm Barrel Adapter</li> <li>• E5 65 W BFR/PVC Halogen Free adapter, 7.4 mm barrel</li> <li>• E5 65 W Rugged Adapter 7.4 mm barrel (India only)</li> <li>• E5 90 W 7.4 mm Barrel Adapter</li> <li>• 65 W adapter, Type-C</li> <li>• 90 W adapter, Type-C</li> </ul>
Input Voltage	100 VAC - 240 VAC
Input current (maximum)	<ul style="list-style-type: none"> <li>• 1.7 A for 65 W</li> <li>• 2.5 A for 90 W</li> </ul>
Input frequency	50 Hz to 60 Hz
Output current	<ul style="list-style-type: none"> <li>• 3.34 A for 65 W</li> <li>• 4.62 A for 90 W</li> </ul>
Rated output voltage	19.5 VDC
Temperature range (Operating)	0°C to 40° C (32°F to 104°F)
Temperature range (Non-Operating)	40°C to 70°C (-40°F to 158°F)

# Dimensions and weight

**Table 20. Dimensions and weight**

Feature	Specifications	
	Aluminum (Al)	Carbon fibre (CF)
Height	Front - 16.57 mm (0.65 inch)	Front - 17.42 mm(0.69 inch)
	Rear- 17.52 mm(0.70 inch)	Rear- 18.45 mm(0.73 inch)
Width	306.5 mm (12.07 inch)	
Depth	206.95 mm (8.15 inch)	
Weight	1.3 Kg (2.88 lb)	1.24 Kg (2.75 lb)

# Computer environment

**Airborne contaminant level:** G1 as defined by ISA-S71.04-1985

**Table 21. Computer environment**

	<b>Operating</b>	<b>Storage</b>
Temperature range	0°C to 40°C (32°F to 104°F)	-40°C to 65°C (-40°F to 149°F)
Relative humidity (maximum)	10% to 90% (non-condensing) <b>i</b>   <b>NOTE: Maximum dew point temperature = 26°C</b>	0% to 95% (non-condensing) <b>i</b>   <b>NOTE: Maximum dew point temperature = 33°C</b>
Vibration (maximum)	0.66 GRMS	1.30 GRMS
Shock (maximum)	140 G †	160 G ‡
Altitude (maximum)	0 m to 3048 m (0 ft to 10,000 ft)	0 m to 10,668 m (0 ft to 35,000 ft)

\* Measured using a random vibration spectrum that simulates user environment.

† Measured using a 2 ms half-sine pulse when the hard drive is in use.

‡ Measured using a 2 ms half-sine pulse when the hard-drive head is in parked position.

# System setup

**CAUTION:** Unless you are an expert computer user, do not change the settings in the BIOS Setup program. Certain changes can make your computer work incorrectly.

**NOTE:** Before you change BIOS Setup program, it is recommended that you write down the BIOS Setup program screen information for future reference.

Use the BIOS Setup program for the following purposes:

- Get information about the hardware installed in your computer, such as the amount of RAM and the size of the hard drive.
- Change the system configuration information.
- Set or change a user-selectable option, such as the user password, type of hard drive installed, and enabling or disabling base devices.

Topics:

- [Boot menu](#)
- [Navigation keys](#)
- [Boot Sequence](#)
- [System setup options](#)
- [Updating the BIOS in Windows](#)
- [System and setup password](#)

## Boot menu

Press <F12> when the Dell logo appears to initiate a one-time boot menu with a list of the valid boot devices for the system. Diagnostics and BIOS Setup options are also included in this menu. The devices listed on the boot menu depend on the bootable devices in the system. This menu is useful when you are attempting to boot to a particular device or to bring up the diagnostics for the system. Using the boot menu does not make any changes to the boot order stored in the BIOS.

The options are:

- UEFI Boot:
  - Windows Boot Manager
- Other Options:
  - BIOS Setup
  - BIOS Flash Update
  - Diagnostics
  - Change Boot Mode Settings

## Navigation keys

**NOTE:** For most of the System Setup options, changes that you make are recorded but do not take effect until you restart the system.

Keys	Navigation
Up arrow	Moves to the previous field.

Keys	Navigation
Down arrow	Moves to the next field.
Enter	Selects a value in the selected field (if applicable) or follow the link in the field.
Spacebar	Expands or collapses a drop-down list, if applicable.
Tab	Moves to the next focus area.
Esc	Moves to the previous page until you view the main screen. Pressing Esc in the main screen displays a message that prompts you to save any unsaved changes and restarts the system.

## Boot Sequence

Boot Sequence allows you to bypass the System Setup–defined boot device order and boot directly to a specific device (for example: optical drive or hard drive). During the Power-on Self Test (POST), when the Dell logo appears, you can:

- Access System Setup by pressing F2 key
- Bring up the one-time boot menu by pressing F12 key

The one-time boot menu displays the devices that you can boot from including the diagnostic option. The boot menu options are:

- Removable Drive (if available)
- STXXXX Drive

**NOTE:** XXX denotes the SATA drive number.

- Optical Drive (if available)
- SATA Hard Drive (if available)
- Diagnostics

**NOTE:** Choosing Diagnostics, will display the ePSA diagnostics screen.

The boot sequence screen also displays the option to access the System Setup screen.

## System setup options

**NOTE:** Depending on the laptop and its installed devices, the items listed in this section may or may not appear.

### General options

Table 22. General

Option	Description
<b>System Information</b>	<p>This section lists the primary hardware features of your computer.</p> <p>The options are:</p> <ul style="list-style-type: none"> <li>• <b>System Information</b> <ul style="list-style-type: none"> <li>– BIOS version</li> <li>– Service Tag</li> <li>– Asset Tag</li> <li>– Ownership Tag</li> <li>– Manufacture Date</li> <li>– Express Service Code</li> </ul> </li> <li>• <b>Memory Configuration</b></li> </ul>

## Option

## Description

- Memory Installed
- Memory Available
- Memory Speed
- Memory Channel Mode
- Memory Technology
- DIMM A Size
- DIMM B Size

 **NOTE:** Due to an amount of memory being assigned for system use, "Memory Available" is less than "Memory Installed". Note that certain operating systems may not be able to use all the available memory.

- **Processor Information**

- Processor Type
- Core Count
- Processor ID
- Current Clock Speed
- Minimum Clock Speed
- Maximum Clock Speed
- Processor L2 Cache
- Processor L3 Cache
- HT Capable
- 64-Bit Technology

- **Device Information**

- M.2 SATA
- M.2 SATA1
- M.2 PCIe SSD-0
- M.2 PCIe SSD-1
- Passthrough MAC Address
- Video Controller
- Video BIOS Version
- Video Memory
- Panel Type
- Native Resolution
- Privacy Screen

 **NOTE:** Applicable for e-Privacy version.

- Audio Controller
- Wi-Fi Device
- Bluetooth Device

## Battery Information

Displays the battery status and the type of AC adapter connected to the computer.

## Boot Sequence

Allows you to change the order in which the computer attempts to find an operating system.

The options are:

- **Windows Boot Manager**—Default

- **Boot List Option:**

Allows you to add, delete and, view the boot list options.

Option	Description
<b>Advanced Boot Options</b>	Allows you to Enable Legacy Option ROMs. <ul style="list-style-type: none"> <li>• <b>Enable UEFI Network Stack</b>—Default</li> </ul>
<b>UEFI Boot Path Security</b>	Allows you to control whether the system prompts the user to enter the Admin password when booting to a UEFI boot path. <p>Click one of the following options:</p> <ul style="list-style-type: none"> <li>• <b>Always, Except Internal HDD</b>—Default</li> <li>• <b>Always, Except Internal HDD &amp; PXE</b></li> <li>• <b>Always</b></li> <li>• <b>Never</b></li> </ul>
<b>Date/Time</b>	Allows you to set the date and time. The change to the system date and time takes effect immediately.

## System configuration

Table 23. System Configuration

Option	Description
<b>SATA Operation</b>	Allows you to configure the operating mode of the integrated SATA hard-drive controller. <p>Click one of the following options:</p> <ul style="list-style-type: none"> <li>• <b>Disabled</b></li> <li>• <b>AHCI</b></li> <li>• <b>RAID On</b>—Default</li> </ul> <p> <b>NOTE: SATA is configured to support RAID mode.</b></p>
<b>Drives</b>	These fields let you enable or disable various drives on board. <p>The options are:</p> <ul style="list-style-type: none"> <li>• <b>SATA-1</b></li> <li>• <b>SATA-2</b></li> <li>• <b>M.2 PCIe SSD-0</b></li> <li>• <b>M.2 PCIe SSD-1</b></li> </ul>
<b>SMART Reporting</b>	This field controls whether hard drive errors for integrated drives are reported during startup. <p>The option is disabled by default.</p>
<b>USB Configuration</b>	Allows you to enable or disable the internal/integrated USB configuration. <p>The options are:</p> <ul style="list-style-type: none"> <li>• <b>Enable USB Boot Support</b></li> <li>• <b>Enable External USB Ports</b></li> </ul> <p>All the options are set by default.</p>

Option	Description
<b>Dell Type-C Dock Configuration</b>	<p data-bbox="804 153 1495 212"><b>NOTE:</b> USB keyboard and mouse always work in the BIOS setup irrespective of these settings.</p> <p data-bbox="804 233 1495 291">Allows you to connect to Dell WD and TB family of docks (Type-C Docks) independent of USB and thunderbolt adapter configuration.</p> <p data-bbox="804 312 1134 338">This option is enabled by default.</p>
<b>Thunderbolt™ Adapter Configuration</b>	<p data-bbox="804 375 1329 401">Allows you to enable or disable Thunderbolt options:</p> <ul data-bbox="804 426 1401 525" style="list-style-type: none"> <li data-bbox="804 426 1198 451">• <b>Thunderbolt (Enabled by Default)</b></li> <li data-bbox="804 459 1198 485">• <b>Enable Thunderbolt Boot Support</b></li> <li data-bbox="804 493 1401 518">• <b>Enable Thunderbolt (and PCIe behind TBT) Pre-boot</b></li> </ul> <p data-bbox="804 543 1107 569">With following security levels :</p> <ul data-bbox="804 594 1278 726" style="list-style-type: none"> <li data-bbox="804 594 970 619">• <b>No Security</b></li> <li data-bbox="804 627 1278 653">• <b>User Authentication (Enabled by Default)</b></li> <li data-bbox="804 661 1015 686">• <b>Secure Connect</b></li> <li data-bbox="804 695 1126 720">• <b>Display Port and USB Only</b></li> </ul>
<b>Thunderbolt™ Auto Switch</b>	<p data-bbox="804 756 1406 814">This option configures the method used by the Thunderbolt controller to perform PCIe device enumeration.</p> <ul data-bbox="804 835 1495 1052" style="list-style-type: none"> <li data-bbox="804 835 1495 911">• <b>Auto Switch</b> : The BIOS will automatically switch between BIOS Assist and Native Thunderbolt PC device enumeration modes to get all benefits of the installed OS</li> <li data-bbox="804 919 1458 978">• <b>Native Enumeration</b>: The BIOS will program the Thunderbolt controller to Native mode ( Auto Switching is disabled)</li> <li data-bbox="804 978 1495 1052">• <b>BIOS Assist Enumeration</b>: The BIOS will program the Thunderbolt controller to BIOS Assist mode ( Auto Switching is disabled)</li> </ul> <p data-bbox="804 1073 1495 1129"><b>NOTE:</b> A reboot is required for these changes to take effect.</p>
<b>USB PowerShare</b>	<p data-bbox="804 1155 1465 1180">This option enable/disable the USB PowerShare feature behavior.</p> <p data-bbox="804 1205 1134 1230">This option is disabled by default.</p>
<b>Audio</b>	<p data-bbox="804 1268 1458 1327">Allows you to enable or disable the integrated audio controller. By default, the <b>Enable Audio</b> option is selected.</p> <p data-bbox="804 1348 967 1373">The options are:</p> <ul data-bbox="804 1398 1094 1457" style="list-style-type: none"> <li data-bbox="804 1398 1046 1423">• <b>Enable Microphone</b></li> <li data-bbox="804 1432 1094 1457">• <b>Enable Internal Speaker</b></li> </ul> <p data-bbox="804 1482 1086 1507">This option is set by default.</p>
<b>Keyboard Illumination</b>	<p data-bbox="804 1543 1430 1602">This field lets you choose the operating mode of the keyboard illumination feature.</p> <ul data-bbox="804 1623 1469 1766" style="list-style-type: none"> <li data-bbox="804 1623 1449 1648">• <b>Disabled</b>: The Keyboard illumination will always be off or 0%.</li> <li data-bbox="804 1656 1378 1715">• <b>Dim</b>: Enable the keyboard illumination feature at 50% brightness.</li> <li data-bbox="804 1715 1469 1766">• <b>Bright (Enabled by Default)</b>: Enable the keyboard illumination feature at 100% brightness level.</li> </ul> <p data-bbox="804 1787 1495 1843"><b>NOTE:</b> Option present on system opted with backlit keyboard.</p>

Option	Description
<b>Keyboard Backlight Timeout on AC</b>	<p>This feature defines the timeout value for the keyboard backlight when an AC adapter is plugged into the system.</p> <p>Options are:</p> <ul style="list-style-type: none"> <li>• <b>5 seconds</b></li> <li>• <b>10 seconds</b>(Default)</li> <li>• <b>15 seconds</b></li> <li>• <b>30 seconds</b></li> <li>• <b>1 minute</b></li> <li>• <b>5 minute</b></li> <li>• <b>15 minute</b></li> <li>• <b>Never</b></li> </ul> <p><b>NOTE:</b> Option present on system opted with backlit keyboard.</p>
<b>Keyboard Backlight Timeout on Battery</b>	<p>This feature defines the timeout value for the keyboard backlight when the system is running only on battery power.</p> <p>Options are:</p> <ul style="list-style-type: none"> <li>• <b>5 seconds</b></li> <li>• <b>10 seconds</b>(Default)</li> <li>• <b>15 seconds</b></li> <li>• <b>30 seconds</b></li> <li>• <b>1 minute</b></li> <li>• <b>5 minute</b></li> <li>• <b>15 minute</b></li> <li>• <b>Never</b></li> </ul> <p><b>NOTE:</b> Option present on system opted with backlit keyboard.</p>
<b>Unobtrusive Mode</b>	<p>When enabled, pressing Fn+F7 will turn off all light and sound emission in the system. Press Fn+F7 to resume normal operation.</p> <p>Default is Disabled.</p>
<b>Fingerprint Reader</b>	<p>Enable or disable the Fingerprint Reader or the Fingerprint Reader Device's Single Sign On capability.</p> <ul style="list-style-type: none"> <li>• <b>Enable Fingerprint Reader Device:</b> Enabled by Default</li> </ul> <p><b>NOTE:</b> Option present on system opted with finger print reader on the power button.</p>
<b>Miscellaneous devices</b>	<p>Allows you to enable or disable various on board devices.</p> <ul style="list-style-type: none"> <li>• <b>Enable Camera</b>—Default</li> <li>• <b>Enable Secure Digital (SD) Card</b></li> <li>• <b>Secure Digital (SD) Card Boot</b> - Disabled</li> <li>• <b>Secure Digital Card (SD) Read-Only Mode</b> - Disabled</li> </ul>
<b>MAC Address Pass-Through</b>	<p>This feature replaces the external NIC MAC address (in a supported dock or dongle) with the selected MAC address from the system. The options are</p> <ul style="list-style-type: none"> <li>• <b>System Unique MAC Address</b>— Default</li> <li>• <b>Disabled</b></li> </ul>

# Video screen options

Table 24. Video

Option	Description
LCD Brightness	Allows you to set the display brightness depending upon the power source. On Battery(100% is default) and On AC (100 % is default).
Privacy Screen	<p>This option Enables or Disables the Privacy Screen if the Panel supports this feature. The options are:</p> <ul style="list-style-type: none"><li>• <b>Disabled:</b> When Disabled the privacy screen is not applied to the embedded display panel.</li><li>• <b>Enabled — Default:</b> When enabled, the privacy screen is applied to the embedded display panel and can be toggled between public mode and privacy mode using the Fn+F9 key combination on the embedded keyboard.</li><li>• <b>Always On:</b> When always on the privacy screen is always on and cannot be turned off by the user.</li></ul> <p> <b>NOTE:</b> This option is present if the display supports e-Privacy panel.</p>

# Security

Table 25. Security

Option	Description
Admin Password	<p>Allows you to set, change, or delete the administrator(admin) password.</p> <p>The entries to set password are:</p> <ul style="list-style-type: none"><li>• <b>Enter the old password:</b></li><li>• <b>Enter the new password:</b></li><li>• <b>Confirm new password:</b></li></ul> <p>Click <b>OK</b> once you set the password.</p> <p> <b>NOTE:</b> For the first time login, "Enter the old password:" field is marked to "Not set". Hence, password has to be set for the first time you login and then you can change or delete the password.</p>
System Password	<p>Allows you to set, change, or delete the System password.</p> <p>The entries to set password are:</p> <ul style="list-style-type: none"><li>• <b>Enter the old password:</b></li><li>• <b>Enter the new password:</b></li><li>• <b>Confirm new password:</b></li></ul> <p>Click <b>OK</b> once you set the password.</p> <p> <b>NOTE:</b> For the first time login, "Enter the old password:" field is marked to "Not set". Hence, password has to be set for the first time you login and then you can change or delete the password.</p>

Option	Description
<b>Strong Password</b>	<p>Allows you to enforce the option to always set strong password.</p> <ul style="list-style-type: none"> <li>• <b>Enable Strong Password</b></li> </ul> <p>This option is not set by default.</p>
<b>Password Configuration</b>	<p>You can define the length of your password. Min = 4, Max = 32</p>
<b>Password Bypass</b>	<p>Allows you to bypass the System password and the Internal HDD password, when it is set, during a system restart.</p> <p>Click one of the options:</p> <ul style="list-style-type: none"> <li>• <b>Disabled</b>—Default</li> <li>• <b>Reboot bypass</b></li> </ul>
<b>Password Change</b>	<p>Allows you to change the System password when the administrator password is set.</p> <ul style="list-style-type: none"> <li>• <b>Allow Non-Admin Password Changes</b></li> </ul> <p>This option is set by default.</p>
<b>Non-Admin Setup Changes</b>	<p>Allows you to determine whether changes to the setup options are allowed when an Administrator Password is set. If disabled the setup options are locked by the admin password.</p> <ul style="list-style-type: none"> <li>• <b>Allow Wireless Switch Changes</b></li> </ul> <p>This option is not set by default.</p>
<b>UEFI Capsule Firmware Updates</b>	<p>Allows you to update the system BIOS via UEFI capsule update packages.</p> <ul style="list-style-type: none"> <li>• <b>Enable UEFI Capsule Firmware Updates</b></li> </ul> <p>This option is set by default.</p>
<b>HDD Security</b>	<p>This options controls the mechanism used by BIOS to block external Self Encrypting Drives (SED) management software to take ownership of the SED. The options are:</p> <ul style="list-style-type: none"> <li>• <b>SED Block SID Authentication</b></li> <li>• <b>PPI Bypass for SED Block SID Command</b></li> </ul> <p>Both the options are disabled by default.</p> <p> <b>NOTE: This option is applicable with laptops shipped with SED</b></p>
<b>TPM 2.0 Security</b>	<p>Allows you to enable or disable the Trusted Platform Module (TPM) during POST.</p> <p>The options are:</p> <ul style="list-style-type: none"> <li>• <b>TPM On</b>—Default</li> <li>• <b>Clear</b></li> <li>• <b>PPI Bypass for Enable Command</b>—Default</li> <li>• <b>PPI Bypass for Disbale Command</b></li> <li>• <b>PPI Bypass for Clear Command</b></li> <li>• <b>Attestation Enable</b>—Default</li> <li>• <b>Key Storage Enable</b>—Default</li> <li>• <b>SHA-256</b>—Default</li> </ul>
<b>Absolute®</b>	<p>This field lets you Enable, Disable, or Permanently Disable the BIOS module interface of the optional Absolute Persistence Module service from Absolute® Software. This option is enabled by default.</p>

Option	Description
<b>OROM Keyboard Access</b>	<p>This option determines whether users are able to enter Option ROM Configuration screens via hotkey during boot. Specifically this settings is capable of preventing access to Intel® RAID(Ctrl+I) or Intel® Management Engine BIOS Extension (Ctrl+P/F12).</p> <p>Options are:</p> <ul style="list-style-type: none"> <li>• <b>Enable</b>— Default</li> <li>• <b>One Time Enable</b></li> <li>• <b>Disable</b></li> </ul>
<b>Admin Setup Lockout</b>	<p>Allows you to prevent users from entering Setup when an administrator password is set.</p> <ul style="list-style-type: none"> <li>• <b>Enable Admin Setup Lockout</b></li> </ul> <p>This option is not set by default.</p>
<b>Master Password Lockout</b>	<p>Allows you to disable master password support.</p> <ul style="list-style-type: none"> <li>• <b>Enable Master Password Lockout</b></li> </ul> <p>This option is not set by default.</p> <p>   <b>NOTE: Hard Disk password should be cleared before the settings can be changed.</b></p>
<b>SMM Security Mitigation</b>	<p>Allows you to enable or disable additional UEFI SMM Security Mitigation protection.</p> <ul style="list-style-type: none"> <li>• <b>SMM Security Mitigation</b></li> </ul> <p>This option is not set by default.</p>

## Secure boot

Table 26. Secure Boot

Option	Description
<b>Secure Boot Enable</b>	<p>Allows you to enable or disable the Secure Boot Feature.</p> <ul style="list-style-type: none"> <li>• <b>Secure Boot Enable</b>—Default</li> </ul>
<b>Secure Boot Mode</b>	<p>Changes to the Secure Boot operation mode modifies the behaviour of Secure Boot to allow evaluation of UEFI driver signatures.</p> <p>Choose one of the option:</p> <ul style="list-style-type: none"> <li>• <b>Deployed Mode</b>—Default</li> <li>• <b>Audit Mode</b></li> </ul>
<b>Expert Key Management</b>	<p>Allows you to enable or disable Expert Key Management.</p> <ul style="list-style-type: none"> <li>• <b>Enable Custom Mode</b></li> </ul> <p>This option is not set by default.</p> <p>The Custom Mode Key Management options are:</p> <ul style="list-style-type: none"> <li>• <b>PK</b>—Default</li> <li>• <b>KEK</b></li> <li>• <b>db</b></li> </ul>

Option	Description
	<ul style="list-style-type: none"> <li>• <b>dbx</b></li> </ul>

## Intel Software Guard Extensions options

Table 27. Intel Software Guard Extensions

Option	Description
<b>Intel SGX Enable</b>	<p>This field specifies you to provide a secured environment for running code/storing sensitive information in the context of the main OS.</p> <p>Click one of the following options:</p> <ul style="list-style-type: none"> <li>• <b>Disabled</b></li> <li>• <b>Enabled</b></li> <li>• <b>Software controlled</b>—Default</li> </ul>
<b>Enclave Memory Size</b>	<p>This option sets <b>SGX Enclave Reserve Memory Size</b></p> <p>Click one of the following options:</p> <ul style="list-style-type: none"> <li>• <b>32 MB</b></li> <li>• <b>64 MB</b></li> <li>• <b>128 MB</b>—Default</li> </ul>

## Performance

Table 28. Performance

Option	Description
<b>Multi Core Support</b>	<p>This field specifies whether the process has one or all cores enabled. The performance of some applications improves with the additional cores.</p> <ul style="list-style-type: none"> <li>• <b>All</b>—Default</li> <li>• <b>1</b></li> <li>• <b>2</b></li> <li>• <b>3</b></li> </ul>
<b>Intel SpeedStep</b>	<p>Allows you to enable or disable the Intel SpeedStep mode of processor.</p> <ul style="list-style-type: none"> <li>• <b>Enable Intel SpeedStep</b></li> </ul> <p>This option is set by default.</p>
<b>C-States Control</b>	<p>Allows you to enable or disable the additional processor sleep states.</p> <ul style="list-style-type: none"> <li>• <b>C states</b></li> </ul> <p>This option is set by default.</p>

Option	Description
Intel® TurboBoost™	This option enables or disables the Intel® TurboBoost™ mode of the processor
Hyper-Thread Control	Allows you to enable or disable the HyperThreading in the processor. <ul style="list-style-type: none"> <li>• <b>Disabled</b></li> <li>• <b>Enabled</b>—Default</li> </ul>

## Power management

Table 29. Power Management

Option	Description
<b>AC Behavior</b>	Allows you to enable or disable the computer from turning on automatically when an AC adapter is connected. <ul style="list-style-type: none"> <li>• <b>Wake on AC</b></li> </ul> This option is not set by default.
<b>Enable Intel Speed Shift technology</b>	This option is used to enable/disable Intel Speed Shift Technology. <p>This option is not set by default.</p>
<b>Auto On Time</b>	Allows you to set the time at which the computer must turn on automatically. <p>The options are:</p> <ul style="list-style-type: none"> <li>• <b>Disabled</b>—Default</li> <li>• <b>Every Day</b></li> <li>• <b>Weekdays</b></li> <li>• <b>Select Days</b></li> </ul> This option is not set by default.
<b>USB Wake Support</b>	Allows you to enable USB devices to wake the system from standby. <ul style="list-style-type: none"> <li>• <b>Wake on Dell USB-C Dock</b></li> </ul> This option is set by default.
<b>Wireless Radio Control</b>	This option if enabled, will sense the connection of the system to a wired network and subsequently disable the selected wireless radios (WLAN and/or WWAN). Upon disconnection from the wired network the selected wireless radio will be enabled. <ul style="list-style-type: none"> <li>• <b>Control WLAN radio</b></li> <li>• <b>Control WWAN radio</b></li> </ul> Both the options are not set by default.
<b>Block Sleep</b>	This option lets you to block entering to sleep in OS environment. <p>This option is not set by default.</p>
<b>Peak Shift</b>	Allows you enable or disable the Peak shift feature. This feature when enabled minimizes the AC power usage at times of peak demand. Battery does not charge between the Peak Shift start and end time

Option	Description
	<p>Peak Shift Start and End Time can be configured for all weekdays</p> <p>This option set the battery threshold value (15 % to 100 %)</p>
<b>Advanced Battery Charge Configuration</b>	<p>This option enables you to maximize the battery health. By enabling this option, your system uses the standard charging algorithm and other techniques, during the non-work hours to improve the battery health.</p> <p>Advanced Battery Charge Mode can be configured for all weekdays</p>
<b>Primary Battery Charge Configuration</b>	<p>Allows you to select the charging mode for the battery.</p> <p>The options are:</p> <ul style="list-style-type: none"> <li>• <b>Adaptive</b>—Default</li> <li>• <b>Standard</b> - Fully charges your battery at a standard rate.</li> <li>• <b>ExpressCharge™</b>- The battery charges over a shorter period of time using Dell's fast charging technology.</li> <li>• <b>Primarily AC use</b></li> <li>• <b>Custom</b></li> </ul> <p>If Custom Charge is selected, you can also configure Custom Charge Start and Custom Charge Stop.</p> <p> <b>NOTE: All charging mode may not be available for all the batteries.</b></p>

## Post behavior

Table 30. POST Behavior

Option	Description
<b>Adapter Warnings</b>	<p>Allows you to enable or disable the system setup (BIOS) warning messages when you use certain power adapters.</p> <ul style="list-style-type: none"> <li>• <b>Enable Adapter Warnings</b>—Default</li> </ul>
<b>Keyboard Embedded</b>	<p>This option lets you choose one of two methods to enable the keypad that is embedded in the internal keyboard. The options are:</p> <ul style="list-style-type: none"> <li>• <b>Fn Key Only</b></li> <li>• <b>By Numlock</b></li> </ul>
<b>Numlock Enable</b>	<p>Allows you to enable or disable the Numlock function when the system boots.</p> <ul style="list-style-type: none"> <li>• <b>Enable Numlock</b>—Default</li> </ul>
<b>Fn Lock Options</b>	<p>Allows you to let hot key combinations Fn + Esc toggle the primary behavior of F1–F12, between their standard and secondary functions. If you disable this option, you cannot toggle dynamically the primary behavior of these keys.</p> <ul style="list-style-type: none"> <li>• <b>Fn Lock</b>—Default</li> </ul> <p>Click one of the following options:</p> <ul style="list-style-type: none"> <li>• <b>Lock Mode Disable/Standard</b></li> <li>• <b>Lock Mode Enable/Secondary</b>—Default</li> </ul>
<b>Fastboot</b>	<p>Allows you to speed up the boot process by bypassing some of the compatibility steps.</p>

Option	Description
	<p>Click one of the following options:</p> <ul style="list-style-type: none"> <li>• <b>Minimal</b>—Default</li> <li>• <b>Thorough</b></li> <li>• <b>Auto</b></li> </ul>
<b>Extended BIOS POST Time</b>	<p>Allows you to create an additional preboot delay.</p> <p>Click one of the following options:</p> <ul style="list-style-type: none"> <li>• <b>0 seconds</b>—Default</li> <li>• <b>5 seconds</b></li> <li>• <b>10 seconds</b></li> </ul>
<b>Full Screen Logo</b>	<p>Allows you to display full screen logo, if your image matches screen resolution.</p> <ul style="list-style-type: none"> <li>• <b>Enable Full Screen Logo</b></li> </ul> <p>This option is not set by default.</p>
<b>Warnings and Errors</b>	<p>Allows you to select different options to either stop, prompt and wait for user input, continue when warnings are detected but pause on errors, or continue when either warnings or errors are detected during the POST process.</p> <p>Click one of the following options:</p> <ul style="list-style-type: none"> <li>• <b>Prompt on Warnings and Errors</b>—Default</li> <li>• <b>Continue on Warnings</b></li> <li>• <b>Continue on Warnings and Errors</b></li> </ul>

## Manageability

 **NOTE:** This option is present if the system has Intel V-Pro enabled.

**Table 31. Manageability**

Option	Description
<b>Intel AMT Capability</b>	<p>This option allows to enable and disable the Intel AMT Capabilities of the system. The options are:</p> <ul style="list-style-type: none"> <li>• <b>Disabled</b></li> <li>• <b>Enabled</b></li> <li>• <b>Restrict MEBx Access</b></li> </ul>
<b>USB Provision</b>	<p>When enabled Intel AMT can be provisioned using the local provisioning file via a USB storage device. This option is disabled by default.</p>
<b>MEBx Hotkey</b>	<p>This option specifies whether the MEBx Hotkey function should be enabled when the system boots.</p>

# Virtualization support

Table 32. Virtualization Support

Option	Description
<b>Virtualization</b>	<p>This option specifies whether a Virtual Machine Monitor (VMM) can utilize the additional hardware capabilities provided by the Intel Virtualization technology.</p> <ul style="list-style-type: none"><li>· <b>Enable Intel Virtualization Technology</b></li></ul> <p>This option is set by default.</p>
<b>VT for Direct I/O</b>	<p>Enables or disables the Virtual Machine Monitor (VMM) from utilizing the additional hardware capabilities provided by the Intel Virtualization technology for direct I/O.</p> <ul style="list-style-type: none"><li>· <b>Enable VT for Direct I/O</b></li></ul> <p>This option is set by default.</p>
<b>Trusted Execution</b>	<p>This option specifies whether a Measured Virtual Machine Monitor (MVMM) can utilize the additional hardware capabilities provided by Intel® Trusted Execution Technology.</p> <p> <b>NOTE:</b> The TPM has to be enabled and activated and Virtualization Technology and VT for Direct I/O must be enabled to use this feature.</p>

# Wireless options

Table 33. Wireless

Option	Description
<b>Wireless Device Enabled</b>	<p>Allows to set the wireless devices that can be controlled by the wireless switch.</p> <p>The options are:</p> <ul style="list-style-type: none"><li>· <b>WWAN / GPS</b></li><li>· <b>WLAN</b></li><li>· <b>Bluetooth®</b></li></ul> <p>All the options are enabled by default.</p>

# Maintenance

Table 34. Maintenance

Option	Description
<b>Service Tag</b>	Displays the service tag of your computer.
<b>Asset Tag</b>	<p>Allows you to create a system asset tag if an asset tag is not already set.</p> <p>This option is not set by default.</p>

Option	Description
<b>BIOS Downgrade</b>	Allows you to flash previous revisions of the system firmware. <ul style="list-style-type: none"> <li>• <b>Allow BIOS Downgrade</b></li> </ul> This option is set by default.
<b>Data Wipe</b>	Allows you to securely erase data from all internal storage devices. <ul style="list-style-type: none"> <li>• <b>Wipe on Next Boot</b></li> </ul> This option is not set by default.
<b>Bios Recovery</b>	<p><b>BIOS Recovery from Hard Drive</b>—This option is set by default. Allows you to recover the corrupted BIOS from a recovery file on the HDD or an external USB key.</p> <p><b>BIOS Auto-Recovery</b>— Allows you to recover the BIOS automatically.</p> <p>   <b>NOTE: BIOS Recovery from Hard Drive field should be enabled.</b></p> <p><b>Always Perform Integrity Check</b>—Performs integrity check on every boot.</p>

## System logs

Table 35. System Logs

Option	Description
<b>BIOS events</b>	Allows you to view and clear the System Setup (BIOS) POST events.
<b>Thermal Events</b>	Allows you to view and clear the System Setup (Thermal) events.
<b>Power Events</b>	Allows you to view and clear the System Setup (Power) events.

## Updating the BIOS in Windows

It is recommended to update your BIOS (System Setup), when you replace the system board or if an update is available. For laptops, ensure that your computer battery is fully charged and connected to a power outlet.

 | **NOTE: If BitLocker is enabled, it must be suspended prior to updating the system BIOS, and then re-enabled after the BIOS update is completed.**

- 1 Restart the computer.
- 2 Go to **Dell.com/support**.
  - Enter the **Service Tag** or **Express Service Code** and click **Submit**.
  - Click **Detect Product** and follow the instructions on screen.
- 3 If you are unable to detect or find the Service Tag, click **Choose from all products**.
- 4 Choose the **Products** category from the list.

 | **NOTE: Choose the appropriate category to reach the product page**

- 5 Select your computer model and the **Product Support** page of your computer appears.
- 6 Click **Get drivers** and click **Drivers and Downloads**.  
The Drivers and Downloads section opens.
- 7 Click **Find it myself**.
- 8 Click **BIOS** to view the BIOS versions.
- 9 Identify the latest BIOS file and click **Download**.

- 10 Select your preferred download method in the **Please select your download method below** window, click **Download File**.  
The **File Download** window appears.
- 11 Click **Save** to save the file on your computer.
- 12 Click **Run** to install the updated BIOS settings on your computer.  
Follow the instructions on the screen.

## Updating BIOS on systems with BitLocker enabled

**CAUTION:** If BitLocker is not suspended before updating the BIOS, the next time you reboot the system it will not recognize the BitLocker key. You will then be prompted to enter the recovery key to progress and the system will ask for this on each reboot. If the recovery key is not known this can result in data loss or an unnecessary operating system re-install. For more information on this subject, see Knowledge Article: <https://www.dell.com/support/article/sln153694>

## Updating your system BIOS using a USB flash drive

If the system cannot load into Windows but there is still a need to update the BIOS, download the BIOS file using another system and save it to a bootable USB Flash Drive.

**NOTE:** You will need to use a bootable USB Flash drive. Please refer to the following article for further details: <https://www.dell.com/support/article/us/en/19/sln143196/>

- 1 Download the BIOS update .EXE file to another system.
- 2 Copy the file e.g. O9010A12.EXE onto the bootable USB Flash drive.
- 3 Insert the USB Flash drive into the system that requires the BIOS update.
- 4 Restart the system and press F12 when the Dell Splash logo appears to display the One Time Boot Menu.
- 5 Using arrow keys, select **USB Storage Device** and click Return.
- 6 The system will boot to a Diag C:\> prompt.
- 7 Run the file by typing the full filename e.g. O9010A12.exe and press Return.
- 8 The BIOS Update Utility will load, follow the instructions on screen.



Figure 1. DOS BIOS Update Screen

# System and setup password

Table 36. System and setup password

Password type	Description
System password	Password that you must enter to log on to your system.
Setup password	Password that you must enter to access and make changes to the BIOS settings of your computer.

You can create a system password and a setup password to secure your computer.

**⚠ CAUTION:** The password features provide a basic level of security for the data on your computer.

**⚠ CAUTION:** Anyone can access the data stored on your computer if it is not locked and left unattended.

**📌 NOTE:** System and setup password feature is disabled.

## Assigning a system setup password

You can assign a new **System or Admin Password** only when the status is in **Not Set**.

To enter the system setup, press F2 immediately after a power-on or re-boot.

- 1 In the **System BIOS** or **System Setup** screen, select **Security** and press Enter.  
The **Security** screen is displayed.
- 2 Select **System/Admin Password** and create a password in the **Enter the new password** field.  
Use the following guidelines to assign the system password:
  - A password can have up to 32 characters.
  - The password can contain the numbers 0 through 9.
  - Only lower case letters are valid, upper case letters are not allowed.
  - Only the following special characters are allowed: space, ("), (+), (,), (-), (.), (/), (:), ([), (\), (]), (^).
- 3 Type the system password that you entered earlier in the **Confirm new password** field and click **OK**.
- 4 Press Esc and a message prompts you to save the changes.
- 5 Press Y to save the changes.  
The computer reboots.

## Deleting or changing an existing system setup password

Ensure that the **Password Status** is Unlocked (in the System Setup) before attempting to delete or change the existing System and/or Setup password. You cannot delete or change an existing System or Setup password, if the **Password Status** is Locked.

To enter the System Setup, press F2 immediately after a power-on or reboot.

- 1 In the **System BIOS** or **System Setup** screen, select **System Security** and press Enter.  
The **System Security** screen is displayed.
- 2 In the **System Security** screen, verify that **Password Status** is **Unlocked**.
- 3 Select **System Password**, alter or delete the existing system password and press Enter or Tab.
- 4 Select **Setup Password**, alter or delete the existing setup password and press Enter or Tab.

**📌 NOTE:** If you change the System and/or Setup password, re-enter the new password when prompted. If you delete the System and/or Setup password, confirm the deletion when prompted.

- 5 Press Esc and a message prompts you to save the changes.
- 6 Press Y to save the changes and exit from System Setup.  
The computer reboot.

# Software

This chapter details the supported operating systems along with instructions on how to install the drivers.

## Downloading drivers

- 1 Turn on the notebook.
- 2 Go to **Dell.com/support**.
- 3 Click **Product Support**, enter the Service Tag of your notebook, and then click **Submit**.

**NOTE:** If you do not have the Service Tag, use the auto detect feature or manually browse for your notebook model.

- 4 Click **Drivers and Downloads**.
- 5 Select the operating system installed on your notebook.
- 6 Scroll down the page and select the driver to install.
- 7 Click **Download File** to download the driver for your notebook.
- 8 After the download is complete, navigate to the folder where you saved the driver file.
- 9 Double-click the driver file icon and follow the instructions on the screen.

# Getting help

## Contacting Dell

① **NOTE:** If you do not have an active Internet connection, you can find contact information on your purchase invoice, packing slip, bill, or Dell product catalog.

Dell provides several online and telephone-based support and service options. Availability varies by country and product, and some services may not be available in your area. To contact Dell for sales, technical support, or customer service issues:

- 1 Go to **Dell.com/support**.
- 2 Select your support category.
- 3 Verify your country or region in the **Choose a Country/Region** drop-down list at the bottom of the page.
- 4 Select the appropriate service or support link based on your need.